

Victory® XL 140

ENGINEERED FOR POWERFUL
PERFORMANCE AND
EXCEPTIONAL STYLE

VICTORY® XL 140

Bristling with high-performance features like full suspension and a hydraulic sealed brake system, the **Victory® XL 140** is a powerful blend of power and precision. The Victory XL 140 features sleek, aggressive style and a wealth of standard luxury touches like a wraparound delta tiller and LED lighting, making it the ultimate outdoor scooter.




Victory® XL 140
Shown above with optional
shield and pillow-top seat

Victory® XL 140

Model number:	SC714
Class of use:	C
Weight capacity:	181 kg
Maximum speed ¹ :	Up to 15 km/h
Ground clearance ² :	13.33 cm
Turning radius:	210.8 cm (right)/ 208.3 cm (left)
Overall length ² :	142.8 cm
Overall width ² :	69.2 cm
Front tyres:	10 cm x 33 cm (pneumatic)
Rear tyres:	10 cm x 33 cm (pneumatic)
Suspension:	Front and Rear
Range per charge ^{1,4} :	100 AH batteries: Standard: Up to 46.57 km Optional: Up to 42.18 km
Maximum safe slope:	10°
Total weight without batteries:	117.70 kg
Heaviest piece when disassembled:	Main Frame: 93.21 kg
Standard seating:	Type: Captain seat Weight: 21.77 kg Material: Black Vinyl Dimensions: width – 49.53 cm (overall width) depth – 44.45 cm (effective depth) height – 47 cm
Drive system:	Rear-wheel drive, sealed transaxle, 24-volt DC motor
Dual braking system:	Regenerative and electromechanical
Battery requirements ³ :	Two 12-volt, deep cycle Size: Group 31 (100 AH) Weight ⁵ : 27.44 kg
Battery charger:	8-amp, off-board

Colours:

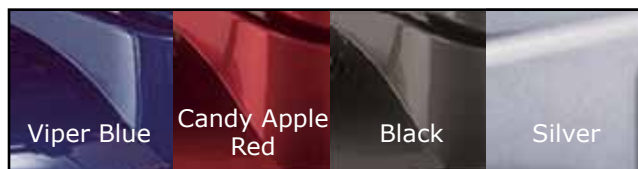

¹Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition and tyre condition.

²Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or - 3%).

³AGM or gel cell type required.

⁴Tested in accordance with ANSI/RESNA, WC Vol2, section 4 & ISO 7176-4 standards. Results derived from theoretical calculations based on battery specifications and drive system performance test conducted at maximum weight capacity.

⁵Battery weight may vary based on manufacturer.

NOTE: All specifications subject to change without notice.

The information contained herein is correct at the time of publication; due to Pride's commitment to constant improvement and development, we reserve the right to alter specifications without prior notice.

Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement.

Features

- Full suspension for optimum handling
- Sealed hydraulic brakes
- Large 33 cm pneumatic tyres for excellent outdoor performance
- Full lighting package including directional signals and headlight
- Delta tiller with wraparound handles
- Easily accessible tie down points (for transport of unoccupied scooter)
- Rearview mirror standard

Options

- Front shield
- Pillow-top seat
- Double crutch holder
- Oxygen tank holder
- Rear basket
- Additional rearview mirror